


Adams Architectural Millwork Co.
2225 Kerper Blvd.
Dubuque, IA 52001
info@adamsarch.com

STORM/SCREEN WINDOWS FOR EXISTING WINDOW; CLEAR PINE TO BE PAINTED EXTERIOR WHITE

COMBINATION PLUS STORM/SCREEN FOR EXISTING FIRST-FLOOR WINDOWS

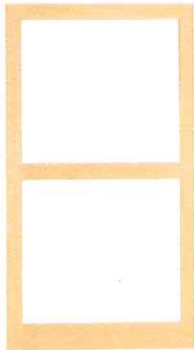

COMBINATION PLUS
STORM/SCREEN

Wood storm and screen window with
interchangeable aluminum framed
storm and screen inserts.

CUSTOM SELF-STORING STORM SCREENS FOR EXISTING SECOND-STORY WINDOWS



SELF-STORING STORM
SCREEN WINDOW

This storm and screen window allows
the homeowner to slide the bottom
pane of glass up to allow fresh air in. No
need to store storm or screen panels.

Standard Unit Measurements: Transom

Standard Double Hung Transom Unit Measurements										
Width										
CN	Masonry Opening		Rough Opening		Frame Size		Sash Size		Daylight Opening	
	ft - in	mm	ft - in	mm	ft - in	mm	ft-in	mm	ft - in	mm
16	1-9 3/4	(552)	1-10 1/4	(565)	1-9 1/4	(540)	1-6 1/16	(459)	1-2 47/64	(374)
20	2-1 3/4	(654)	2-2 1/4	(667)	2-1 1/4	(641)	1-10 1/16	(560)	1-6 47/64	(476)
24	2-5 3/4	(756)	2-6 1/4	(768)	2-5 1/4	(743)	2-2 1/16	(662)	1-10 47/64	(577)
26	2-7 3/4	(806)	2-8 1/4	(819)	2-7 1/4	(794)	2-4 1/16	(713)	2-0 47/64	(628)
28	2-9 3/4	(857)	2-10 1/4	(870)	2-9 1/4	(845)	2-6 1/16	(764)	2-2 47/64	(679)
30	2-11 3/4	(908)	3-0 1/4	(921)	2-11 1/4	(895)	2-8 1/16	(814)	2-4 47/64	(730)
32	3-1 3/4	(959)	3-2 1/4	(972)	3-1 1/4	(946)	2-10 1/16	(865)	2-6 47/64	(781)
36	3-5 3/4	(1060)	3-6 1/4	(1073)	3-5 1/4	(1048)	3-2 1/16	(967)	2-10 47/64	(882)
40	3-9 3/4	(1162)	3-10 1/4	(1175)	3-9 1/4	(1149)	3-6 1/16	(1068)	3-2 47/64	(984)
54	4-11 3/4	(1518)	5-0 1/4	(1530)	4-11 1/4	(1505)	4-8 1/16	(1424)	4-4 47/64	(1339)

Standard Double Hung Transom Unit Measurements										
Height										
CN	Masonry Opening		Rough Opening		Frame Size		Sash Size		Daylight Opening	
	ft - in	mm	ft - in	mm	ft - in	mm	ft-in	mm	ft - in	mm
12	1-7 15/16	(506)	1-8 3/16	(513)	1-7 11/16	(500)	1-5 7/8	(454)	1-0 3/4	(324)
20	2-3 15/16	(710)	2-4 3/16	(716)	2-3 11/16	(703)	2-1 7/8	(657)	1-8 3/4	(527)

Clad Ultimate Double Hung - Next Generation 2.0

Standard Unit Measurements: Picture



Standard Double Hung Picture Unit Measurements										
Width										
CN	Masonry Opening		Rough Opening		Frame Size		Sash Size		Daylight Opening	
	ft - in	mm	ft - in	mm	ft - in	mm	ft-in	mm	ft - in	mm
40	3-5 3/4	(1060)	3-6 1/4	(1073)	3-5 1/4	(1048)	3-3 17/32	(1004)	2-10 47/64	(882)
48	4-1 3/4	(1264)	4-2 1/4	(1276)	4-1 1/4	(1251)	3-11 17/32	(1207)	3-6 47/64	(1085)
52	4-5 3/4	(1365)	4-6 1/4	(1378)	4-5 1/4	(1353)	4-3 17/32	(1309)	3-10 47/64	(1187)
60	5-1 3/4	(1568)	5-2 1/4	(1581)	5-1 1/4	(1556)	4-11 17/32	(1512)	4-6 47/64	(1390)
68	5-9 3/4	(1772)	5-10 1/4	(1784)	5-9 1/4	(1759)	5-7 17/32	(1715)	5-2 47/64	(1593)

Standard Double Hung Picture Unit Measurements										
Height										
CN	Masonry Opening		Rough Opening		Frame Size		Sash Size		Daylight Opening	
	ft - in	mm	ft - in	mm	ft - in	mm	ft-in	mm	ft - in	mm
38	3-3 3/4	(1010)	3-4	(1016)	3-3 1/2	(1003)	3-1 1/16	(941)	2-7 27/64	(798)
42	3-7 3/4	(1111)	3-8	(1118)	3-7 1/2	(1105)	3-5 1/16	(1043)	2-11 27/64	(900)
46	3-11 3/4	(1213)	4-0	(1219)	3-11 1/2	(1207)	3-9 1/16	(1145)	3-3 27/64	(1001)
50	4-3 3/4	(1314)	4-4	(1321)	4-3 1/2	(1308)	4-1 1/16	(1246)	3-7 27/64	(1103)
54	4-7 3/4	(1416)	4-8	(1422)	4-7 1/2	(1410)	4-5 1/16	(1348)	3-11 27/64	(1204)
58	4-11 3/4	(1518)	5-0	(1524)	4-11 1/2	(1511)	4-9 1/16	(1449)	4-3 27/64	(1306)
62	5-3 3/4	(1619)	5-4	(1626)	5-3 1/2	(1613)	5-1 1/16	(1551)	4-7 27/64	(1408)
66	5-7 3/4	(1721)	5-8	(1727)	5-7 1/2	(1715)	5-5 1/16	(1653)	4-11 27/64	(1509)
70	5-11 3/4	(1822)	6-0	(1829)	5-11 1/2	(1816)	5-9 1/16	(1754)	5-3 27/64	(1611)
74	6-3 3/4	(1924)	6-4	(1930)	6-3 1/2	(1918)	6-1 1/16	(1856)	5-7 27/64	(1712)
78	6-7 3/4	(2026)	6-8	(2032)	6-7 1/2	(2019)	6-5 1/16	(1957)	5-11 27/64	(1814)
86	7-3 3/4	(2229)	7-4	(2235)	7-3 1/2	(2223)	7-1 1/16	(2161)	6-7 27/64	(2017)
90	7-7 3/4	(2330)	7-8	(2337)	7-7 1/2	(2324)	7-5 1/16	(2262)	6-11 27/64	(2119)

Clad Ultimate Double Hung - Next Generation 2.0

Section Details: Operating (with Optional Lift Lock Hardware)





Scale: 3" = 1' 0"

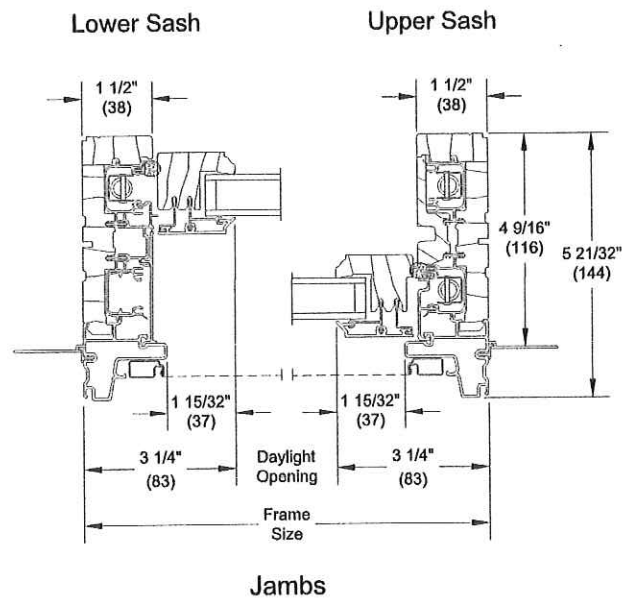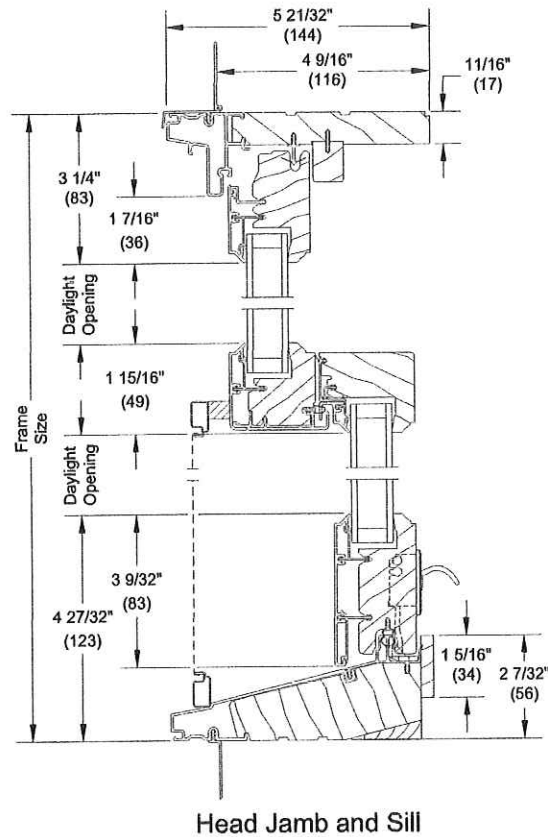

Clad Ultimate Double Hung - Next Generation 2.0

Section Details: Operating


Scale: 3" = 1' 0"

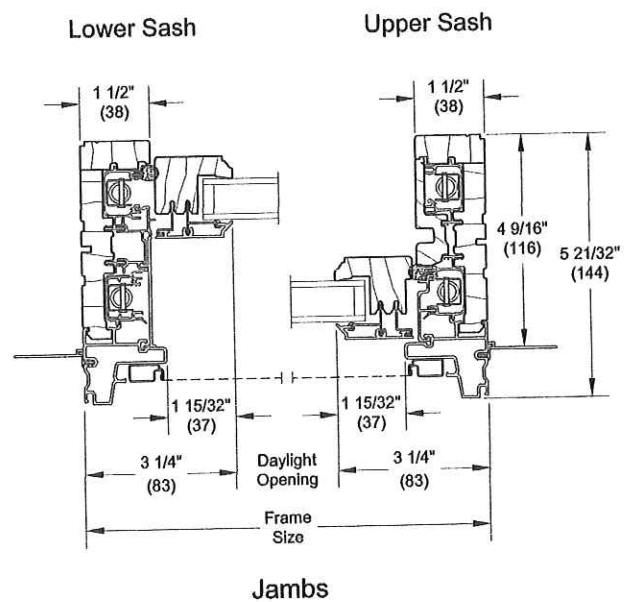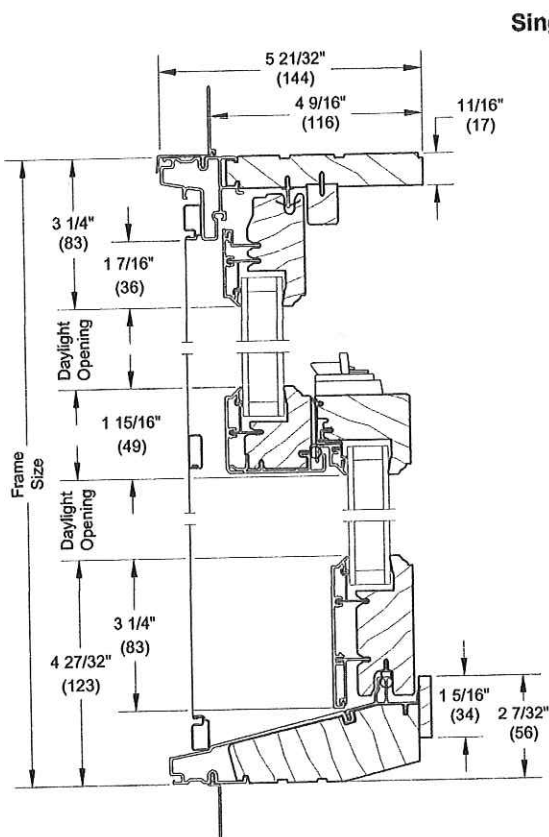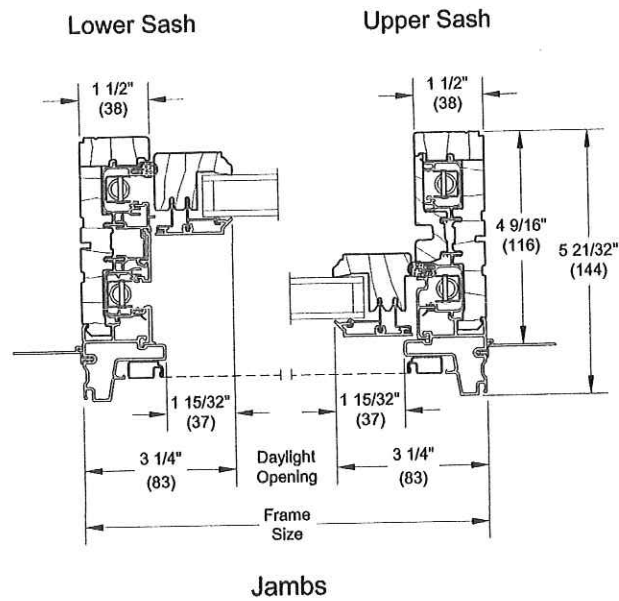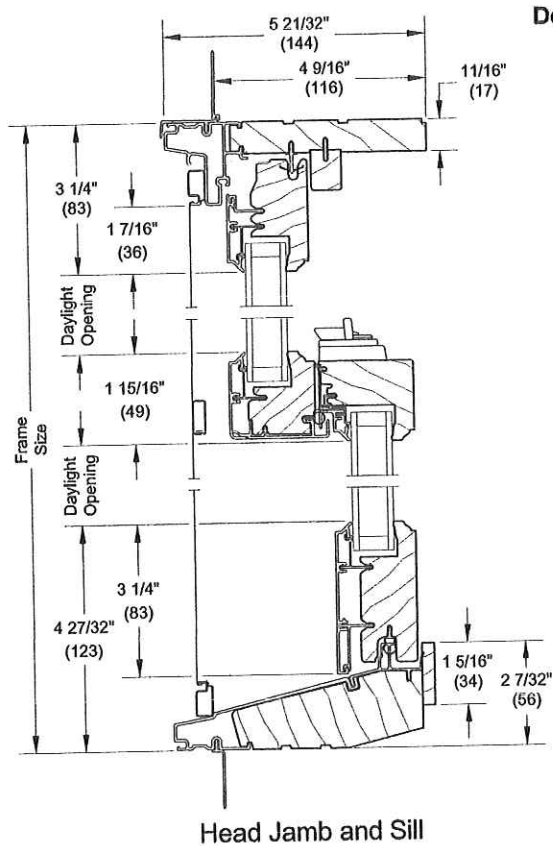

Clad Ultimate Double Hung - Next Generation 2.0

Section Details: IZ3 Operating

Scale: 3" = 1' 0"


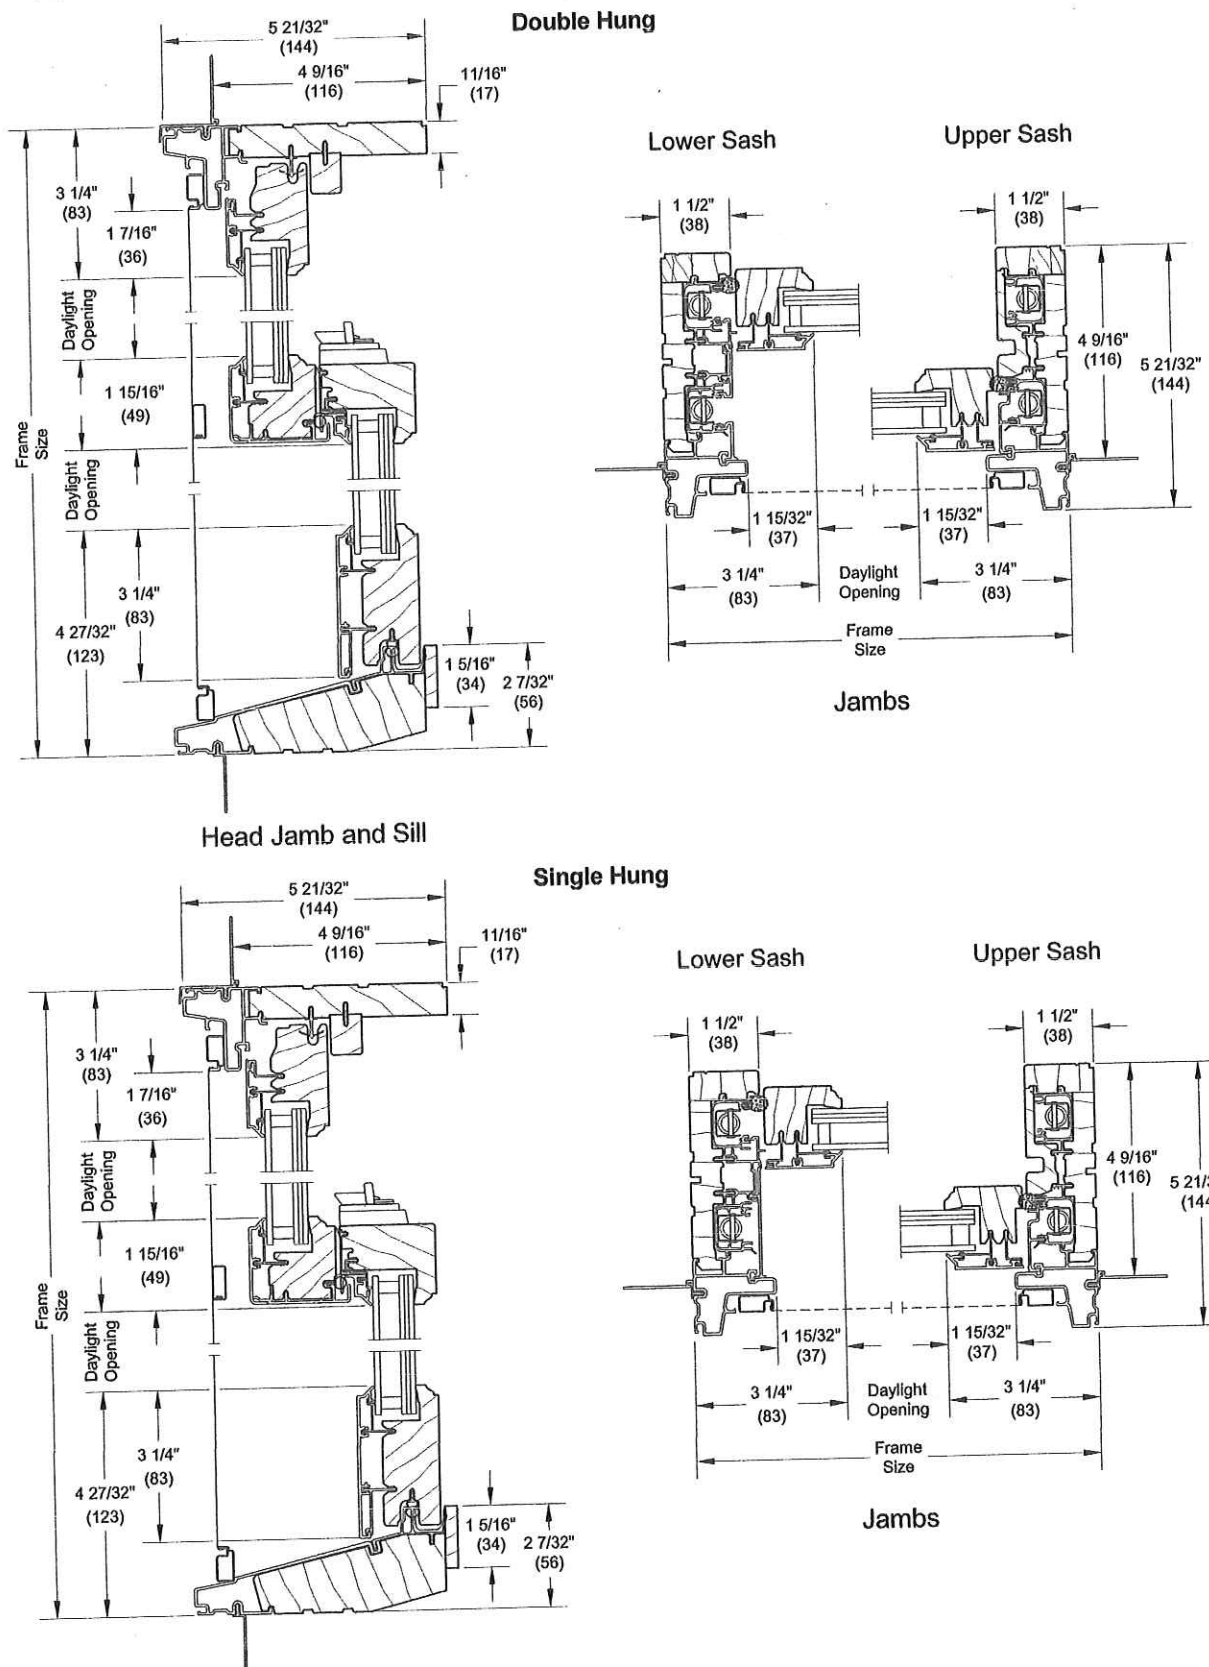


NOTE: CE mark is not available on Impact units.

Clad Ultimate Double Hung - Next Generation 2.0

Section Details: Operating (Commercial Window Performance Rating)


Scale: 3" = 1' 0"

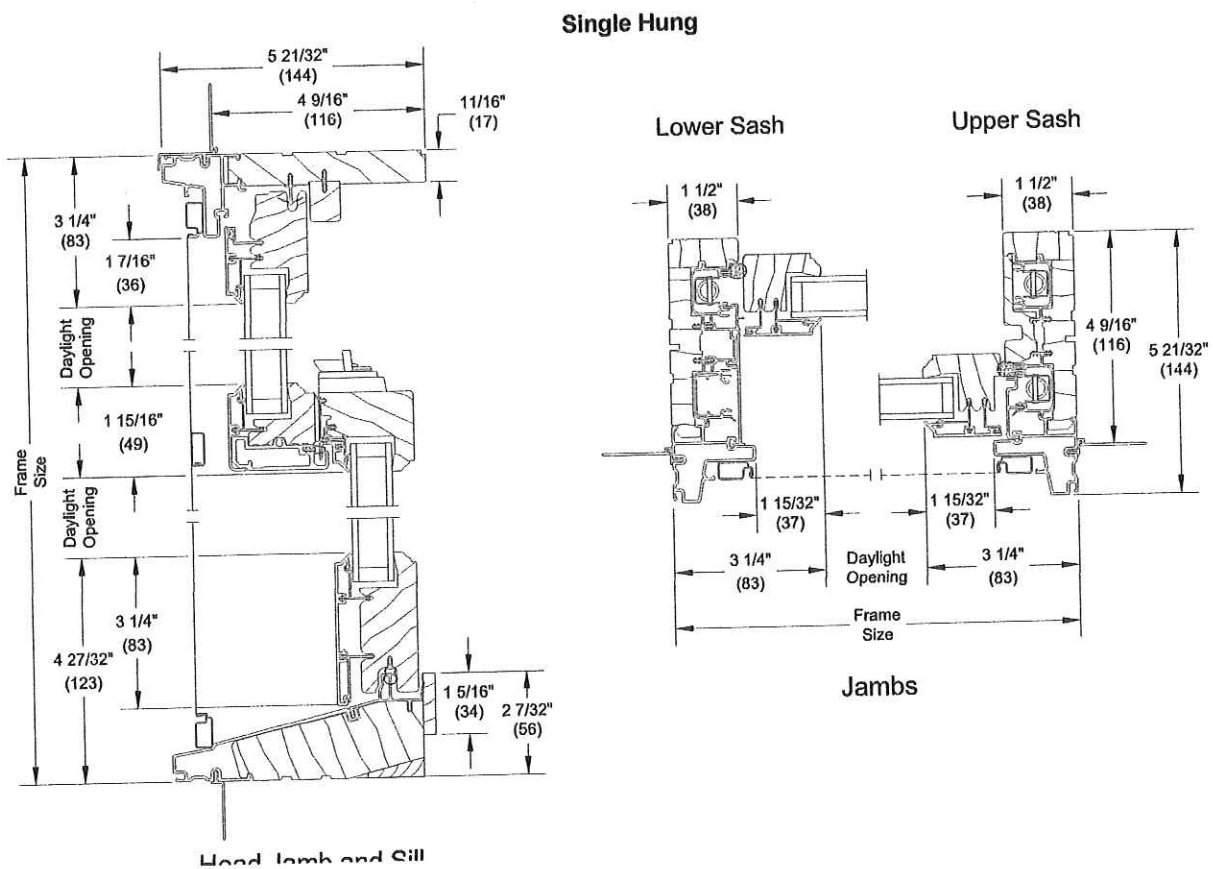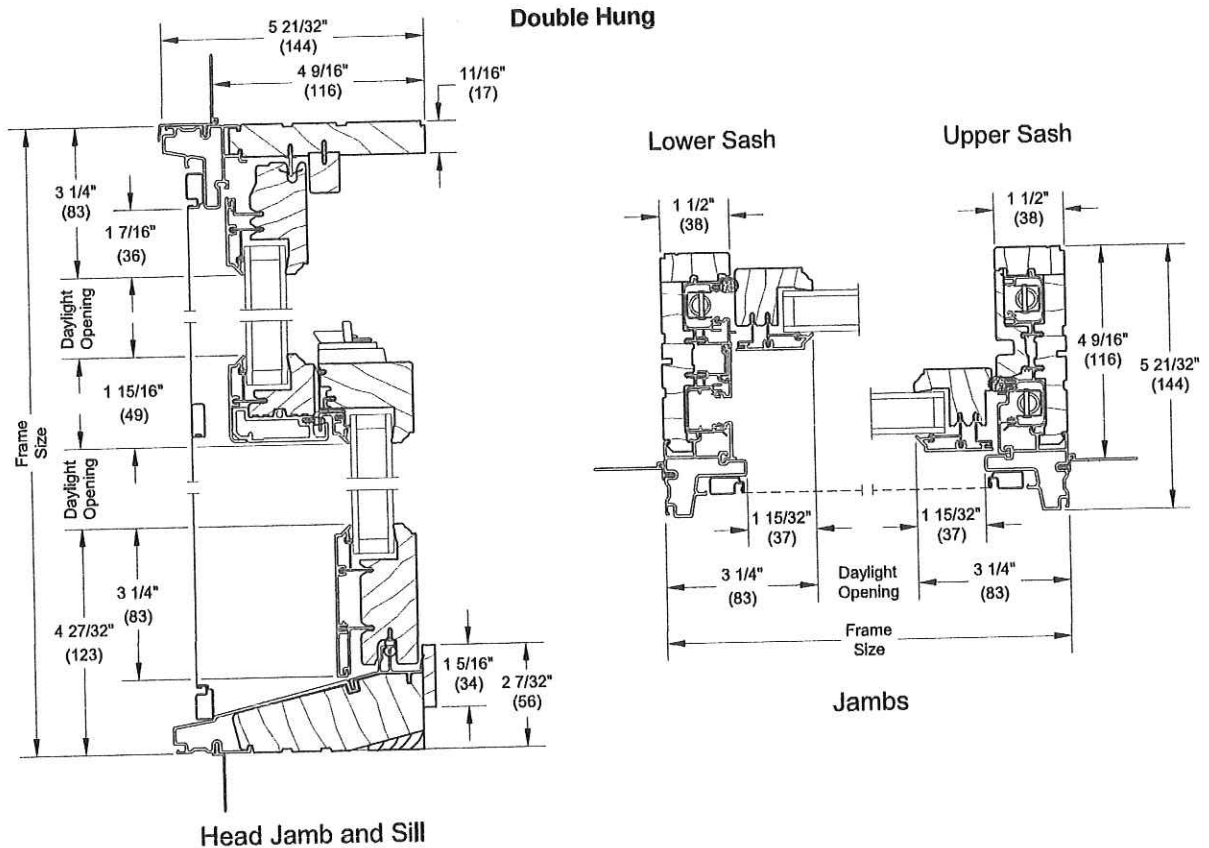

Clad Ultimate Double Hung - Next Generation 2.0

Section Details: IZ3 Operating

Scale: 3" = 1' 0"

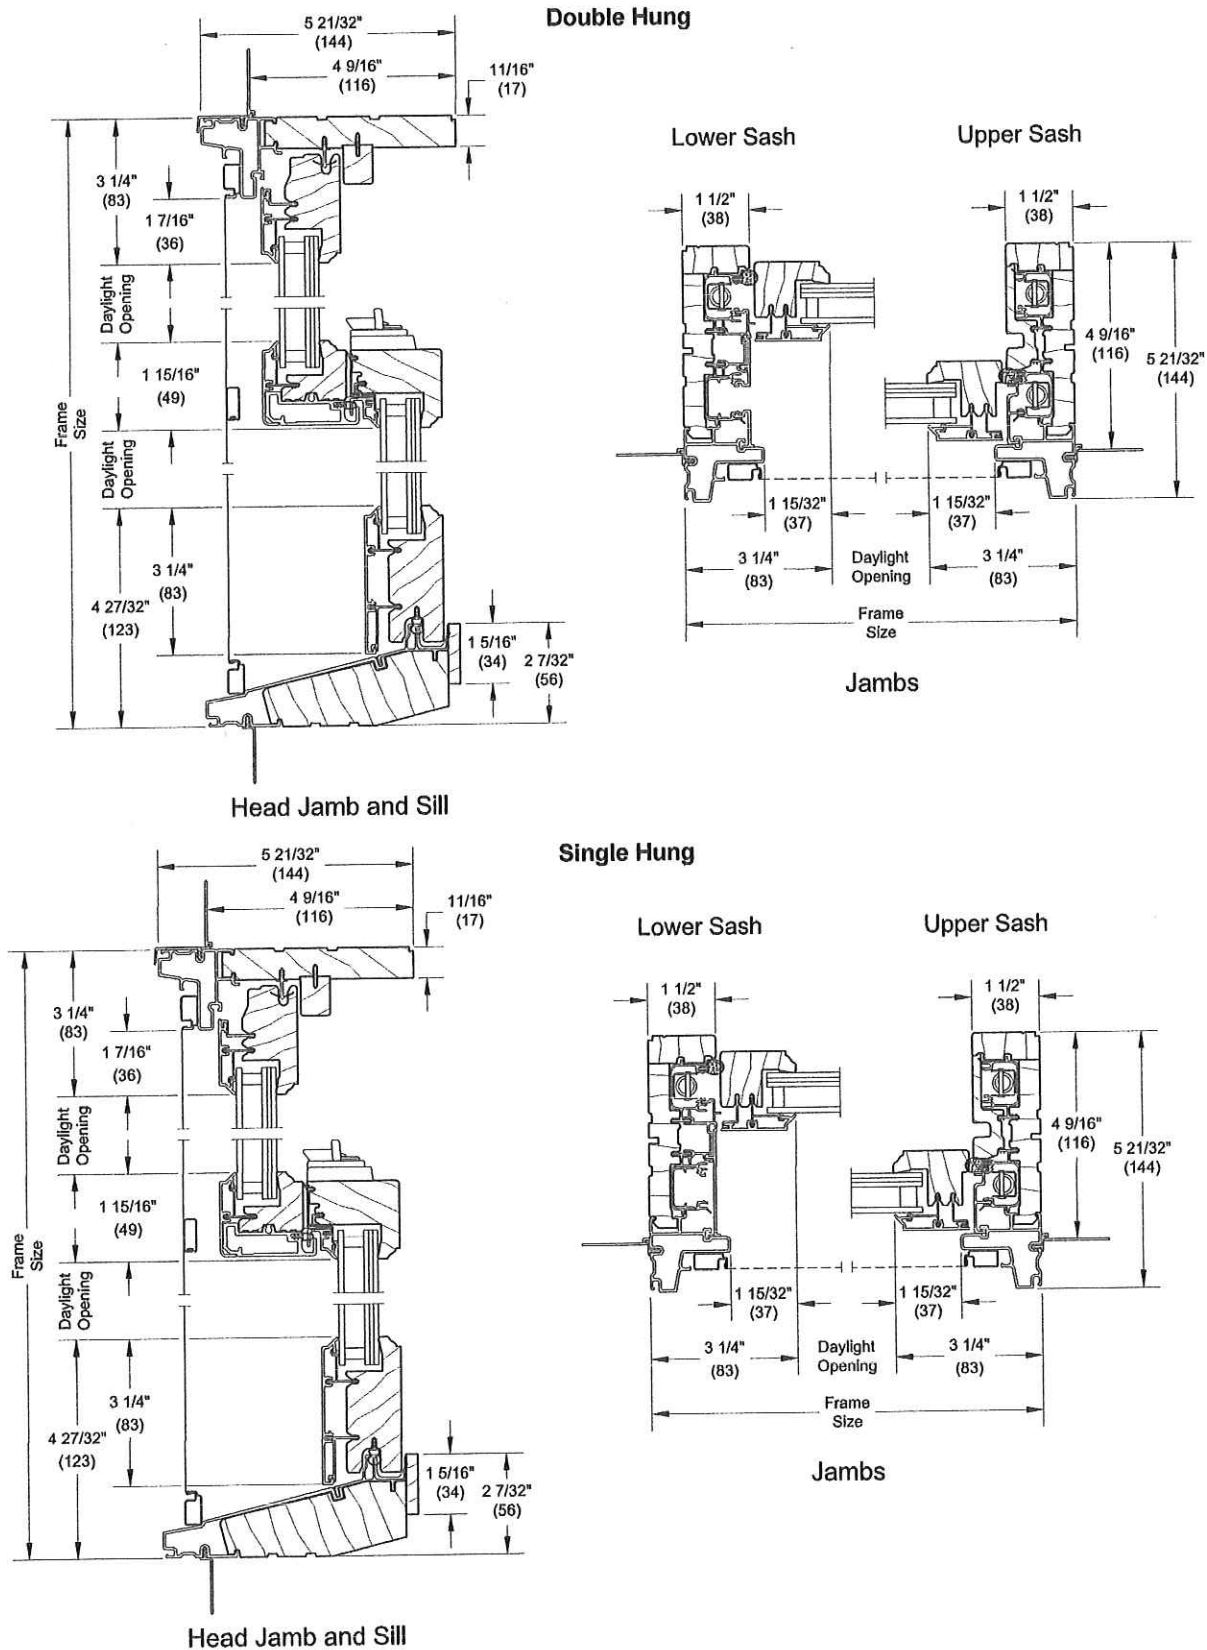

NOTE: CE mark is not available on Impact units.


Reinforced check rail required for applicable sizes)

Clad Ultimate Double Hung - Next Generation 2.0


Section Details: Transom and Picture

Scale: 3" = 1' 0"

Transom

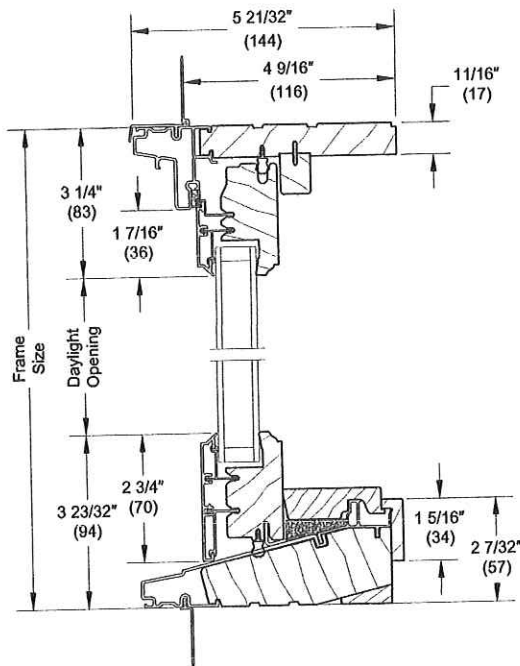


Head Jamb and Sill

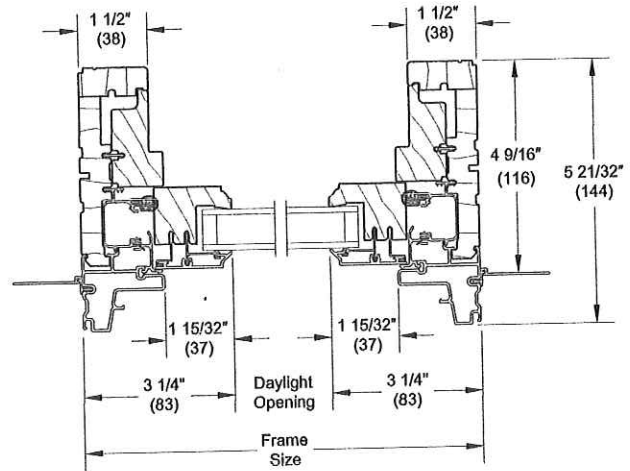


Jamb

Picture

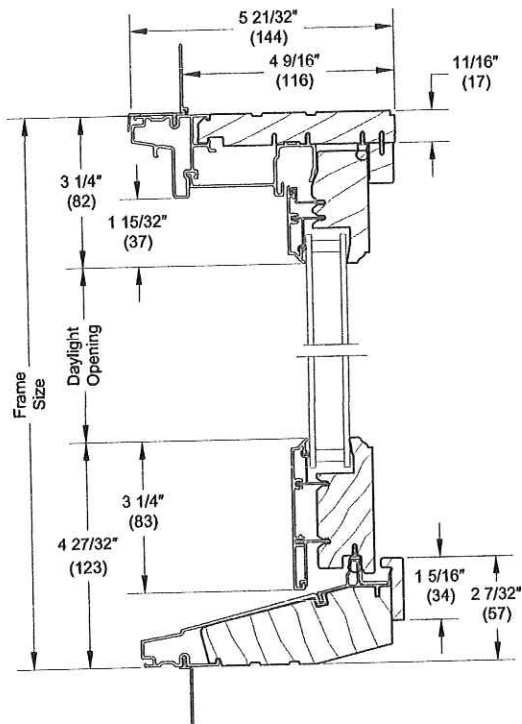

Head Jamb & Sill

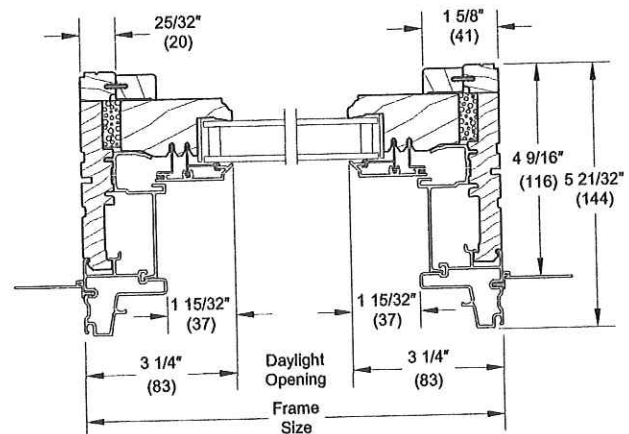


Jamb

Clad Ultimate Double Hung - Next Generation 2.0


Section Details: IZ3 Transom and Picture

Scale: 3" = 1' 0"

Transom

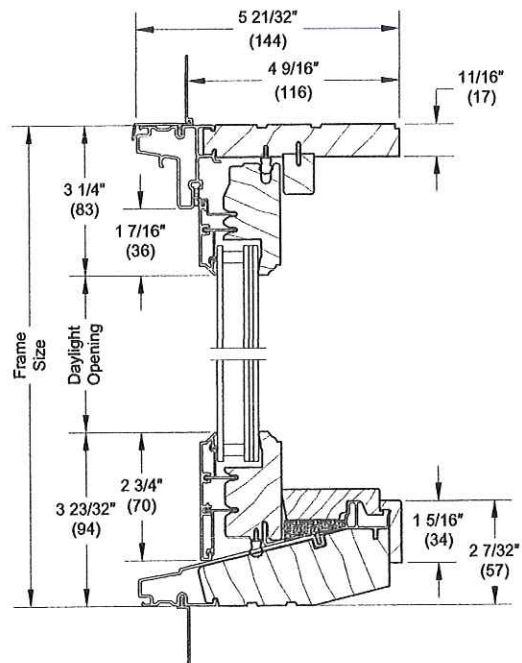


Head Jamb and Sill

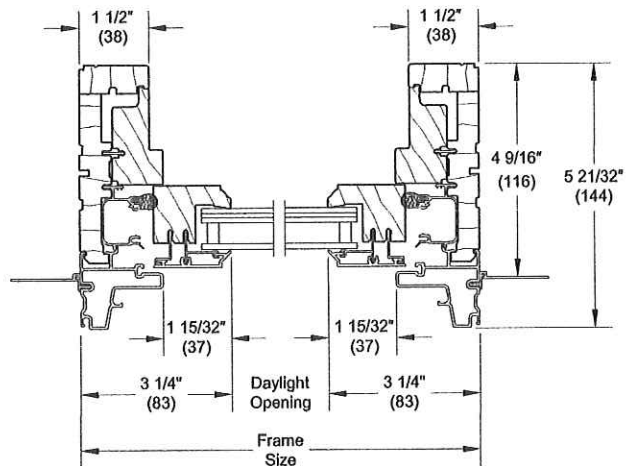


Jambs

Picture

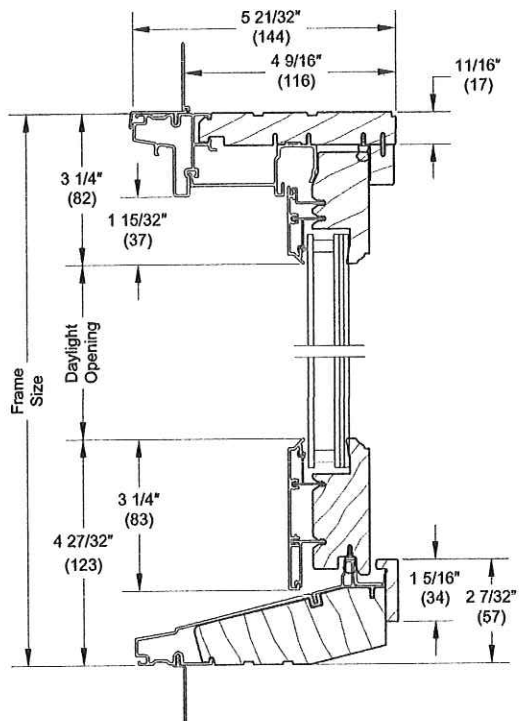

Head Jamb & Sill


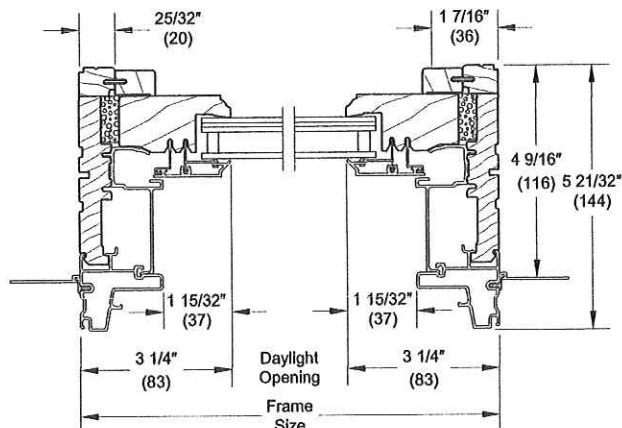


Jambs

NOTE: CE mark is not available on Impact units.

Section Details: Casings

Scale: 3" = 1' 0"

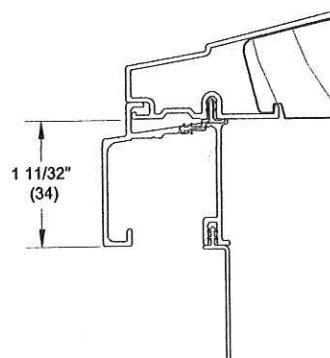
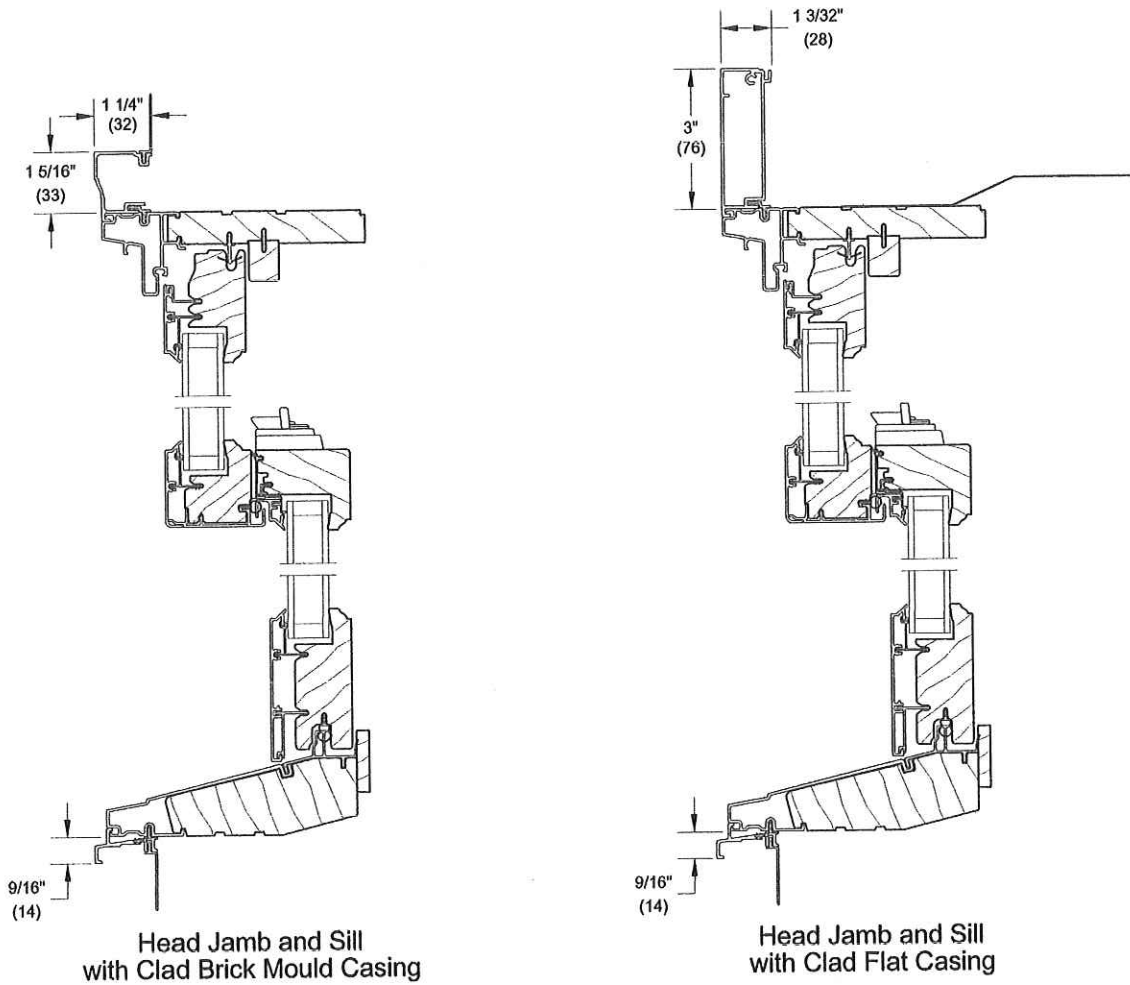


Sill with (A217) Simulated Thick Subsill
Scale: 2:1

Clad Ultimate Double Hung - Next Generation 2.0

Section Details: 6 9/16" Combination

Scale: 3" = 1' 0"

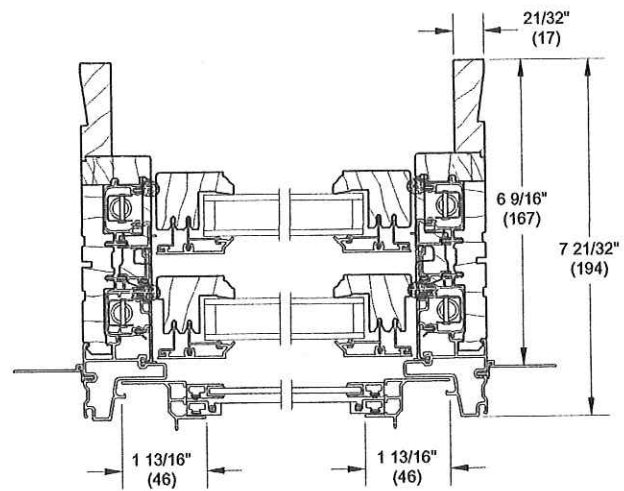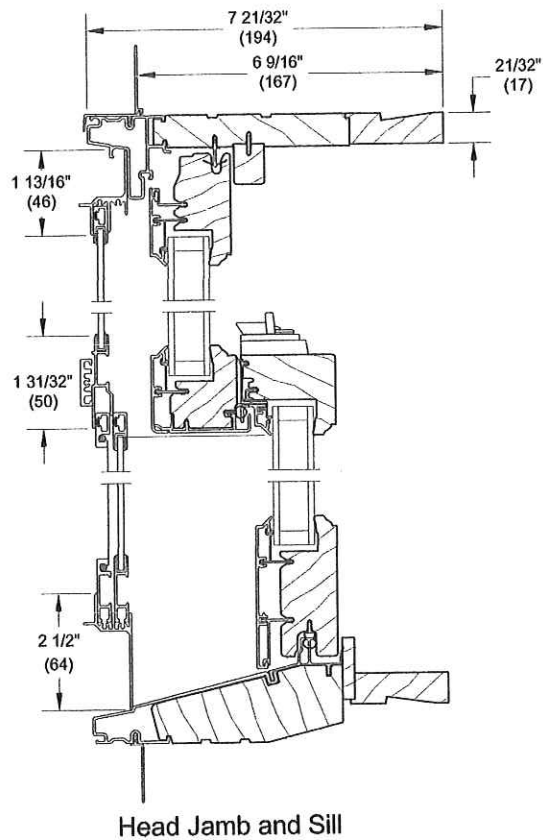


Jambs

Clad Ultimate Double Hung - Next Generation 2.0

Section Details: Interior Shade


Scale: 3" = 1' 0"

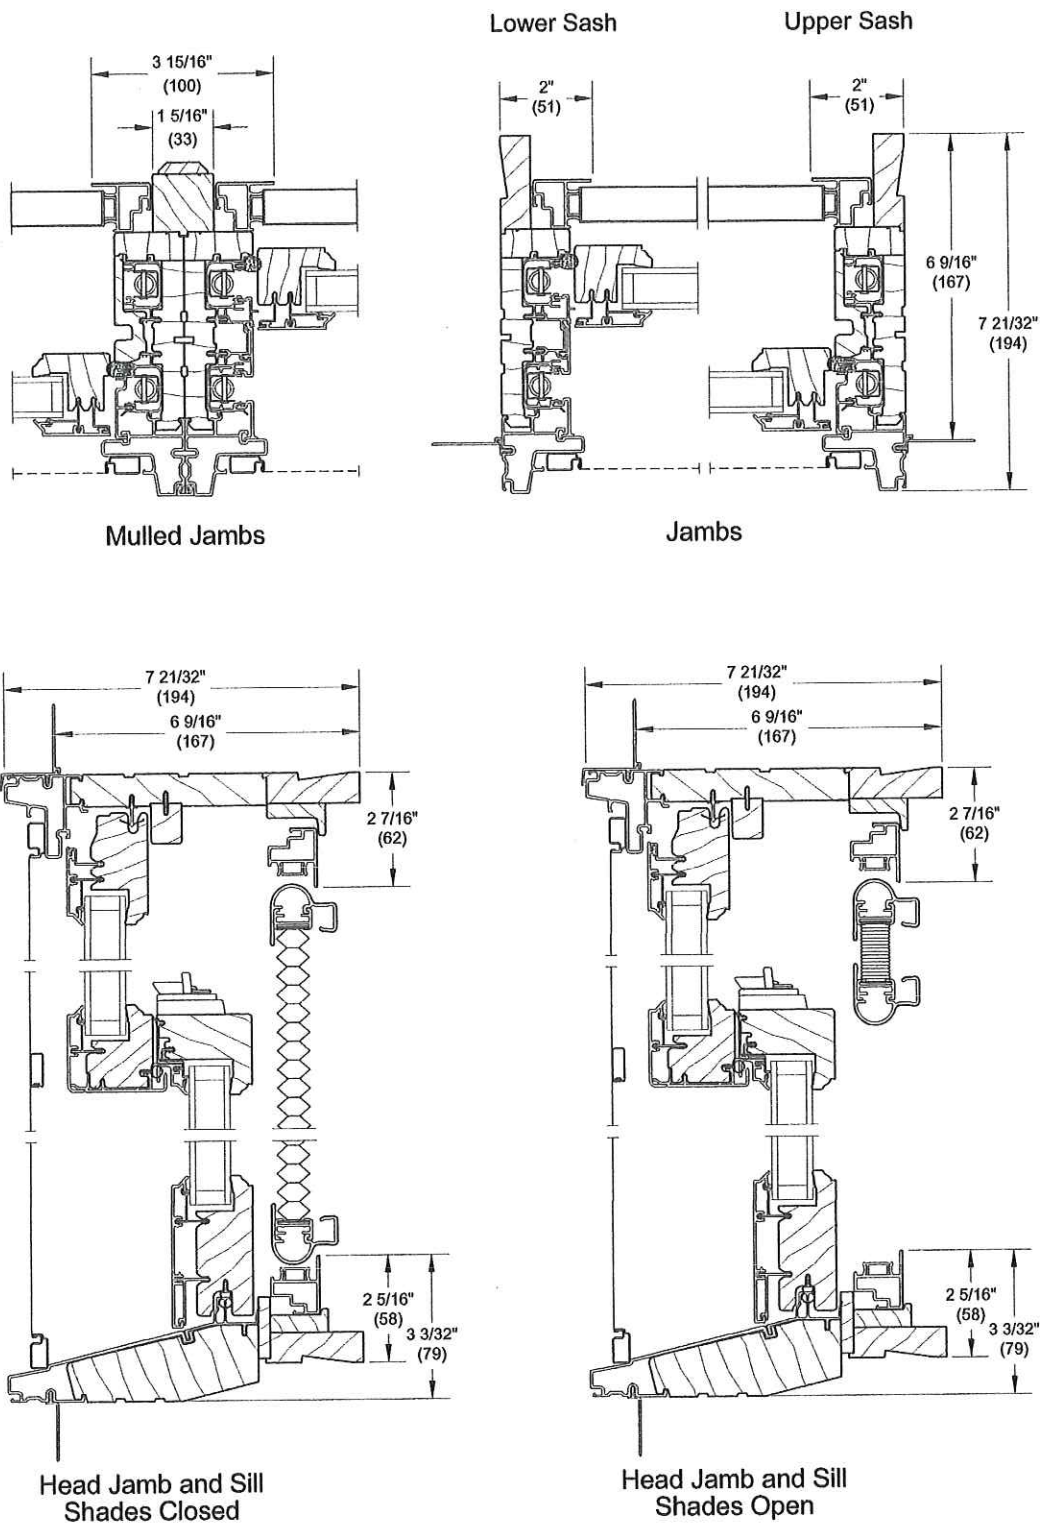


Clad Ultimate Double Hung - Next Generation 2.0

Section Details: Muller Units with Interior Shade Option

Scale: 3" = 1' 0"

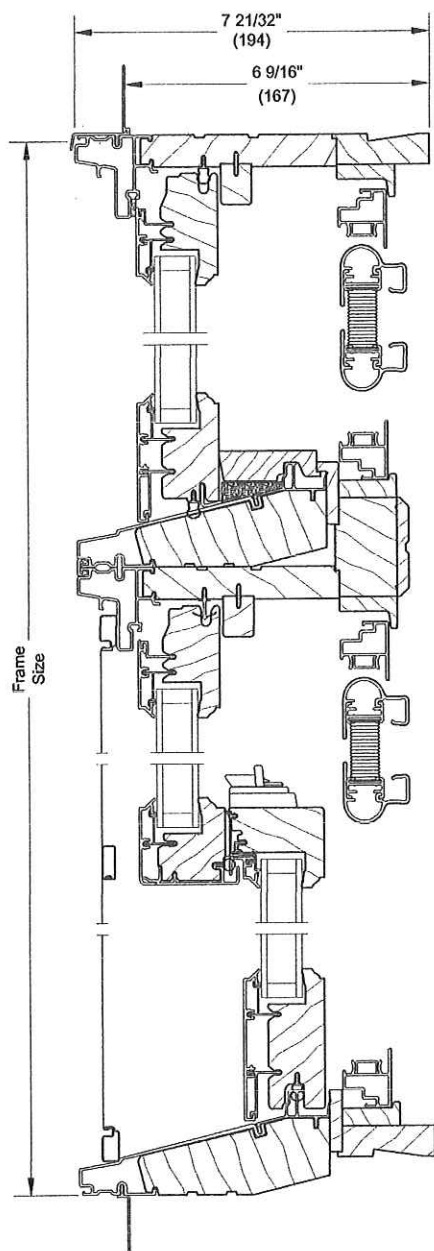

UDH-NG 2.0 w/ Transom
Shades Open

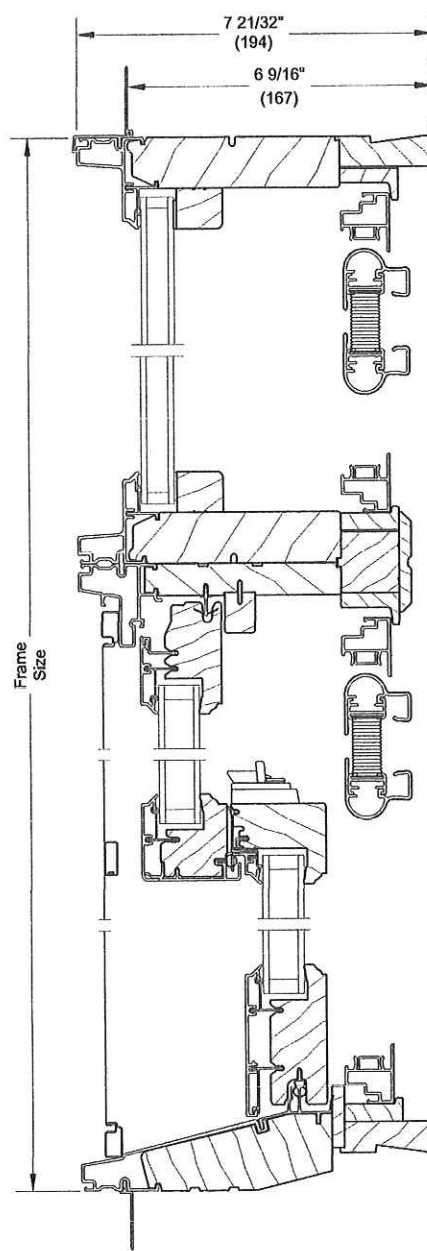

UDH-NG 2.0 w/ DG Polygon
Shades Open