

[Home](#)[Learn About CMS](#)[Our Products](#)[Our Services](#)[Why Work With CMS](#)[Photo Gallery](#)[Building Green With CMS](#)[Locations / Contact Us](#)[Request Information](#)[Our Products](#) > NCR Panels


NCR Panels



A low profile loc panel for residential or commercial applications. No clips are required to install this versatile panel.



NCR Panel Profile



> [CMS has energy-efficient cool roof colors from Sherwin Williams](#)


Product Features

- NCR panels are a 1" high standing seam snap loc panel.
- Custom cut to the inch in lengths from four (4) to forty (40) feet.
 - For panels over forty (40) feet in length, please call.
- Available in 24 and 26 gauge steel, with 16 inch coverage.
- All panels are produced with striations. Striations help reduce the effects of oil canning.
- Warranties up to 40 years.
- A full line of [standard or custom trim](#) items are available in matching or contrasting colors.

Colors

The NCR panel is available in all of our unique COLOR LOC® Kynar 500®/Hylar 5000® painted 24 gauge steel.


Classic Copper
Premium Color
Cool Color


Coastal White
Cool Color


Ruby Red
Premium Color
Cool Color



Colonial Red
Cool Color



PAGE 2
↓



The NCR panel is also available in our 26 gauge siliconized polyester paint system.

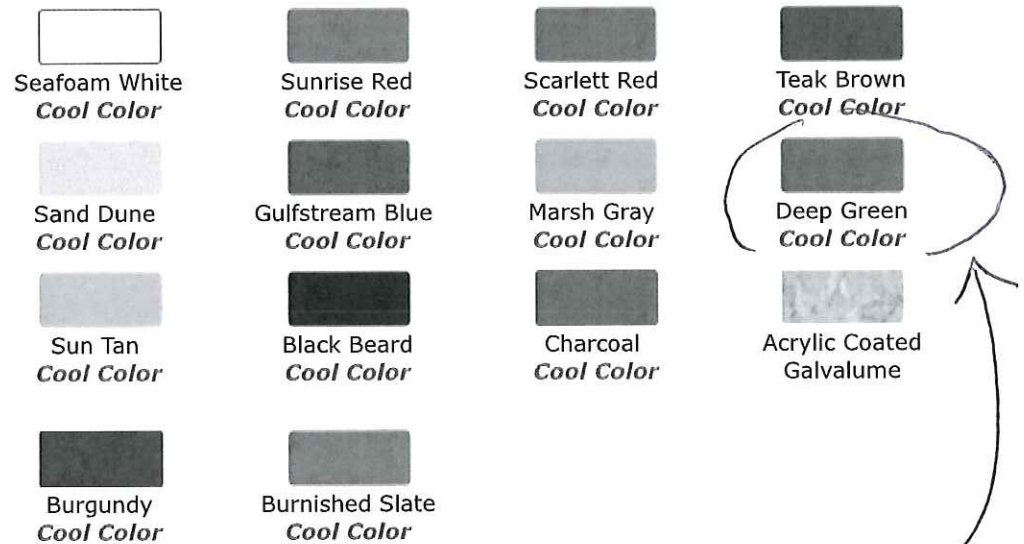

Colors are represented as closely as possible.
If color match is critical, please request a physical sample..

Installation

Installation Manual for Architectural Panels

- NCR panels must be installed over solid decking only. When solid decking is used, a water shedding membrane must be used. This membrane should be a minimum of 30 pound felt.
- Recommended minimum slope is 2 1/2" in 12 inches.
- NCR panels do not require the use of clips to fasten to the deck. Slots in the panel allow for the use of pan head screws for attachment .
- Consult your Architect or Engineer for local building codes and/or restrictions.
- Oil canning is not considered a cause for rejecting the panels.

Touch Up Paint

- To read about our recommended use of touch up paint, click below.